

TRUCK TIRES



DELIVERING PERFORMANCE
DRIVING GROWTH



TABLE OF

CONTENTS

CONTENTS

STEERING AXLE

BRS1/BL221/BL223/BL615

4/5

DRIVE AXLE

BRD1/BL831/BL833/BL835/BL836

6/7/8

TRAILER AXLE

BRT1/BLT11/BLT16/BLT17

8/9/10

ALL POSITION AXLES

BL225/BLT15

10/11

TECHNICAL DATA


12/13/14/15

BRS1

REGIONAL

STEERING AXLE

- ✓ Innovative “SOCT” technology provides support on excellent mileage and handling performance
- ✓ Variable depth of sipes helps to ensure even wear of tread and good wet braking performance
- ✓ “Gemstone” groove help to prevent stone trapping and puncture to enhance casing toughness

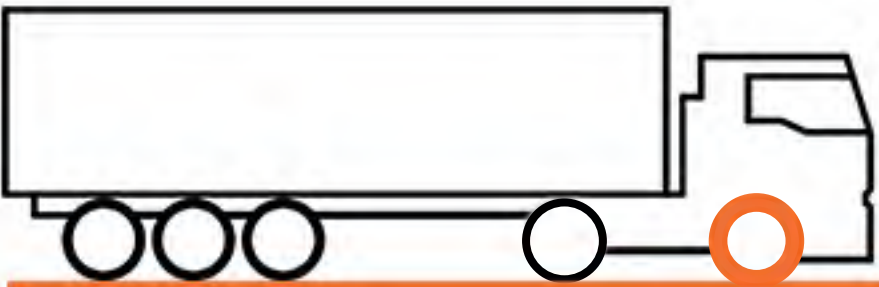


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
295/60R22.5	16PR	150/147L	9.00	D	B	B	72	3PMSF	12.5
315/60R22.5	18PR	154/150L(152/148M)	9.75	D	B	B	72	3PMSF	12.5
315/70R22.5	18PR	156/150L(154/150M)	9.00	C	B	B	72	3PMSF	14.5
315/80R22.5	22PR	158/150L(154/150M)	9.00	C	B	B	72	3PMSF	15.0

BL221

REGIONAL

STEERING AXLE

- ✓ Suitable for steer and trailer axle of trucks running with high speed on highway
- ✓ Low rolling resistance, reducing fuel consumption
- ✓ Lasting grip and stability by hidden groove design
- ✓ New pattern design, improving mileage for long distance transportation

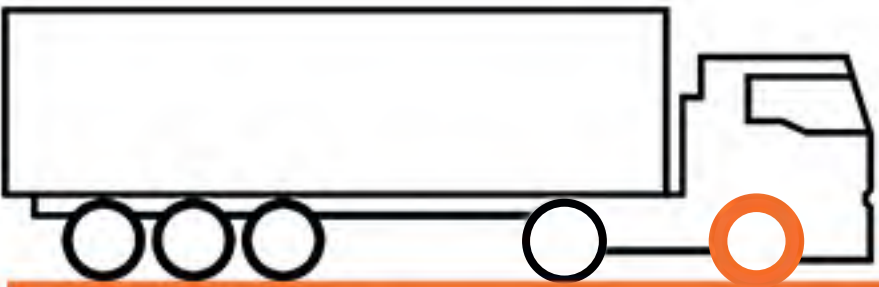


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
295/60R22.5	16PR	150/147L	9.00	D	C	A	70	3PMSF	13.0
295/80R22.5	18PR	154/149M	9.00	D	C	A	70	3PMSF	14.0
315/60R22.5	16PR	152/148L	9.75	D	C	A	70	3PMSF	12.5
315/70R22.5	18PR	156/150L(154/150M)	9.00	D	C	A	70	3PMSF	15.0
385/55R22.5	20PR	160K(158L)	12.25	D	C	A	70	3PMSF	12.0

BL223

REGIONAL

STEERING AXLE

- ✓ Suitable for steer and trailer axle of trucks running under a wide range of use, from highway to light unpaved road
- ✓ Optimization of the shoulder block, improving resistance to shoulder damage
- ✓ Lasting grip and stability, with stone rejection design
- ✓ High wear resistance

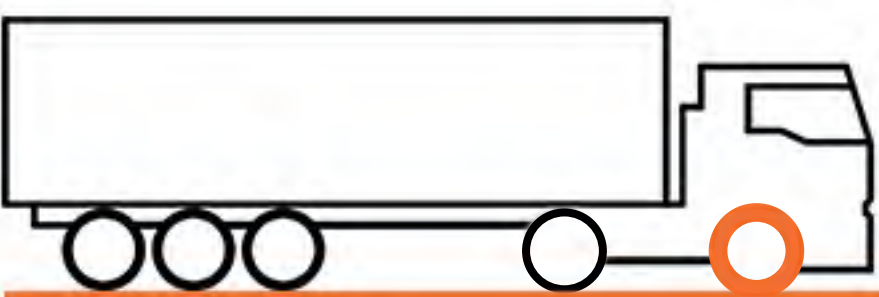


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
295/60R22.5	16PR	150/147L	9.00	D	C	A	69	3PMSF	14.0
295/80R22.5	18PR	154/149M	9.00	D	C	A	69	3PMSF	16.5
315/60R22.5	16PR	152/148L	9.75	D	C	A	69	3PMSF	12.5
315/70R22.5	18PR	156/150L(154/150M)	9.00	D	C	A	69	3PMSF	15.5
315/80R22.5	22PR	158/150L(154/150M)	9.00	D	C	A	69	3PMSF	15.5
385/55R22.5	20PR	160K(158L)	12.25	D	C	A	69	3PMSF	13.5
385/65R22.5	24PR	164K(158L)	11.75	D	C	A	69	3PMSF	15.5

BL615

REGIONAL

STEERING AXLE

- ✓ Long life
- ✓ Retreadability
- ✓ Low eccentric wear

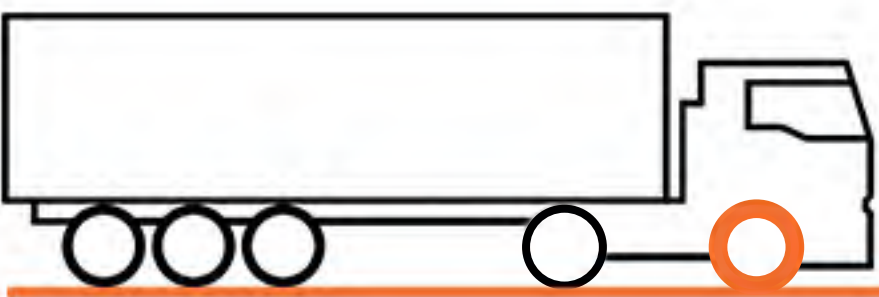


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
215/75R17.5	14PR	126/124M	6.00	D	B	B	73	3PMSF	11.5
235/75R17.5	14PR	132/130M	6.75	D	B	B	73	3PMSF	12.5
245/70R19.5	16PR	136/134M	7.50	D	B	B	73	3PMSF	12.5
265/70R19.5	16PR	140/138M	7.50	D	B	B	73	3PMSF	13.5
285/70R19.5	18PR	146/144M	8.25	D	B	B	73	3PMSF	13.5
305/70R19.5	18PR	148/145M	9.00	D	B	B	73	3PMSF	12.0

BRD1

REGIONAL

DRIVE AXLE

- ✓ Innovative “SOCT” technology provides support on excellent mileage and handling performance
- ✓ 3D interlocking technology helps to control the movement of the tread blocks to avoid abnormal block wear
- ✓ Variable depth of sipes helps to ensure even wear of tread and good wet braking performance

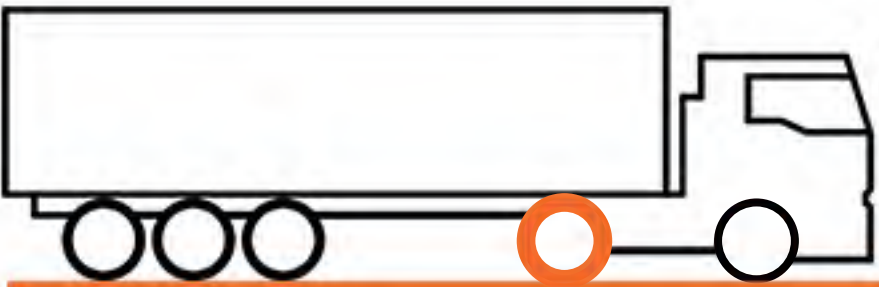


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
295/60R22.5	16PR	150/147L	9.00	E	B	C	75	3PMSF	17.0
315/60R22.5	16PR	152/148M	9.75	E	B	C	75	3PMSF	18.5
315/70R22.5	16PR	154/150L(152/148M)	9.00	E	B	C	75	3PMSF	19.5
315/80R22.5	20PR	156/150L(154/150M)	9.00	E	B	C	75	3PMSF	20.5

BL831

REGIONAL

DRIVE AXLE

- ✓ Suitable for drive axle of trucks running with high speed on highway
- ✓ Low rolling resistance, reducing fuel consumption
- ✓ Lasting grip and stability by hidden groove design, with M+S and 3PMSF marking
- ✓ New pattern design, improving mileage for long distance transportation

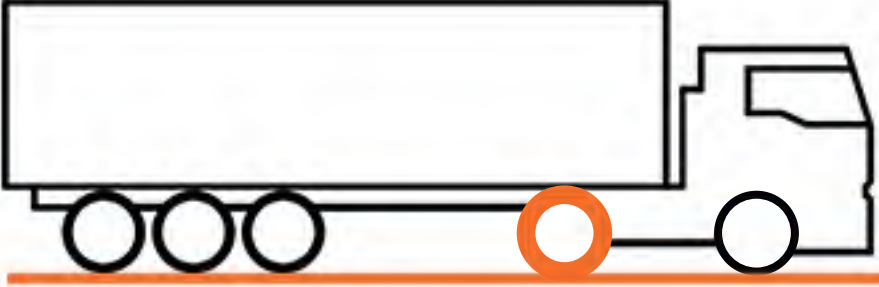


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
295/60R22.5	16PR	150/147L	9.00	C	C	B	73	3PMSF	16.0
295/80R22.5	16PR	152/148M	9.00	C	C	B	73	3PMSF	16.0
315/60R22.5	16PR	152/148L	9.75	C	C	B	73	3PMSF	14.5
315/70R22.5	18PR	156/150L(154/150M)	9.00	C	C	B	73	3PMSF	16.5
315/80R22.5	20PR	156/150L(154/150M)	9.00	C	C	B	73	3PMSF	17.0

BL833

REGIONAL

DRIVE AXLE

- ✓ Suitable for drive axle of trucks running under a wide range of use, from highway to light unpaved road
- ✓ Optimization of the shoulder block, improving resistance to shoulder damage
- ✓ Lasting grip and stability, with M+S and 3PMSF marking
- ✓ High wear resistance

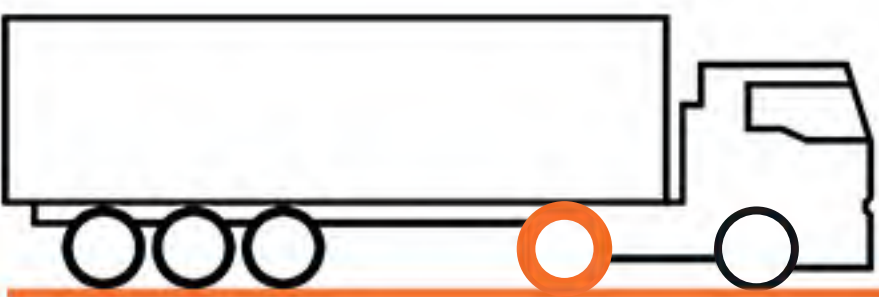


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
295/60R22.5	16PR	150/147L	9.00	D	B	C	75	3PMSF	18.0
295/80R22.5	16PR	152/148M	9.00	D	B	C	75	3PMSF	20.5
315/60R22.5	16PR	152/148L	9.75	D	B	C	75	3PMSF	17.5
315/70R22.5	18PR	156/150L(154/150M)	9.00	D	B	C	75	3PMSF	20.0
315/80R22.5	20PR	156/150L(154/150M)	9.00	D	B	C	75	3PMSF	22.0

BL835

ON/OFF Road

DRIVE AXLE

- ✓ Suitable for drive axle of trucks under all kinds of working conditions
- ✓ Thick sidewall design protect against sidewall impacts and bruises
- ✓ Stone rejection design protect groove bottom from stone puncture
- ✓ Lasting grip and stability, with M+S and 3PMSF marking

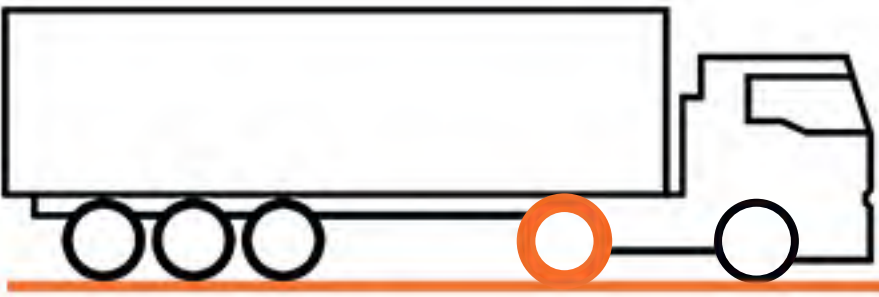


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
13R22.5	18PR	156/150K	9.75	D	B	B	73	3PMSF	21.0
315/80R22.5	20PR	156/150K	9.00	D	B	B	73	3PMSF	21.0

BL836 REGIONAL

DRIVE AXLE

- ✓ Typical block pattern design suitable for drive axle of trucks
- ✓ Good braking and grip on the road

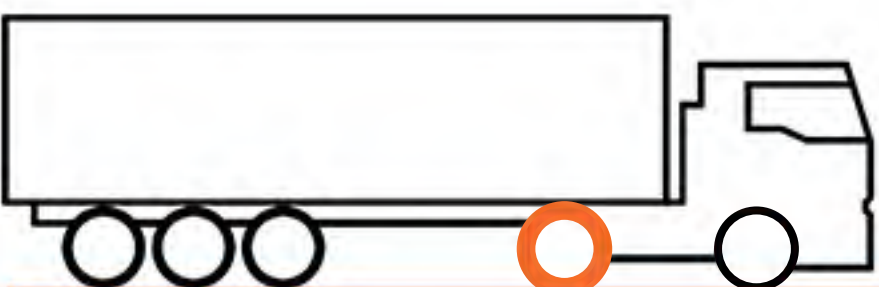


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
215/75R17.5	14PR	126/124M	6.00	E	C	B	73	3PMSF	12.5
225/75R17.5	14PR	129/127M	6.75	E	C	B	73	3PMSF	12.5
235/75R17.5	14PR	132/130M	6.75	E	C	B	73	3PMSF	13.5
285/70R19.5	18PR	146/144M	8.25	E	C	B	73	3PMSF	16.0
305/70R19.5	18PR	148/145M	9.00	E	C	B	73	3PMSF	13.5

BRT1 REGIONAL

TRAILER AXLE

- ✓ Innovative “SOCT” technology provides support on excellent mileage and handling performance
- ✓ Multi-sipes design helps to provide constant grip
- ✓ ‘Gradually’ groove help to prevent stone trapping and puncture to enhance casing toughness

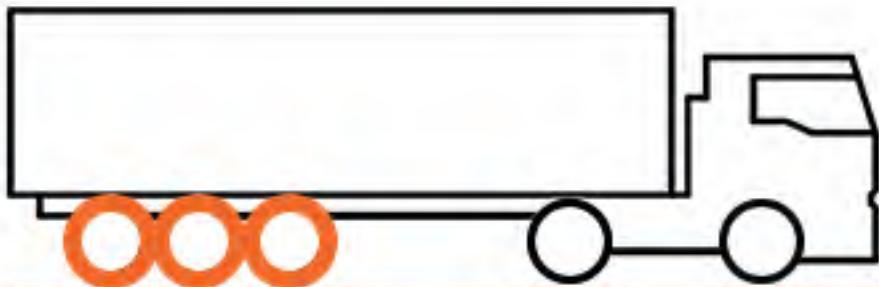


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
385/55R22.5	20PR	160K	12.25	C	A	A	68	3PMSF	14.5
385/65R22.5	24PR	164K(158L)	11.75	C	A	A	68	3PMSF	15.5

BLT11

REGIONAL

TRAILER AXLE

- ✓ Suitable for trailer axle of trucks running with high speed on highway
- ✓ Low rolling resistance,reducing fuel consumption
- ✓ Lasting grip and stability by hidden groove design
- ✓ New pattern design, improving mileage for long distance transportation

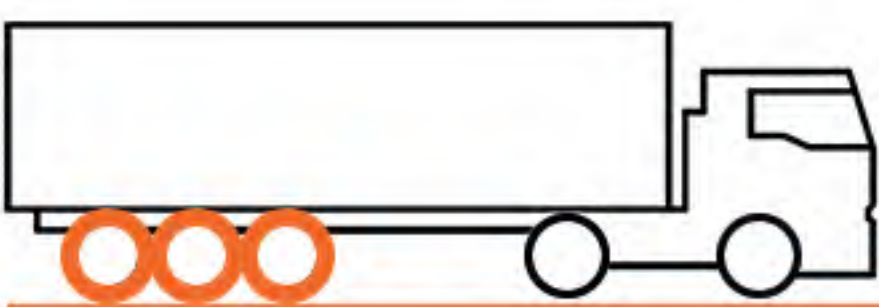


Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
385/55R19.5	18PR	156J	12.25	C	C	B	73	3PMSF	12.5
385/55R22.5	20PR	160K(158L)	12.25	C	C	B	73	3PMSF	12.0
385/65R22.5	24PR	164K(158L)	11.75	C	C	B	73	3PMSF	13.5
425/65R22.5	20PR	165K	12.25	C	C	B	73	3PMSF	14.5
435/50R19.5	20PR	160J	14.00	C	C	B	73	3PMSF	12.5
445/45R19.5	20PR	160J	15.00	C	C	B	73	3PMSF	12.5

BLT16

REGIONAL

TRAILER AXLE

- ✓ Suitable for medium trucks running on the high-grade road

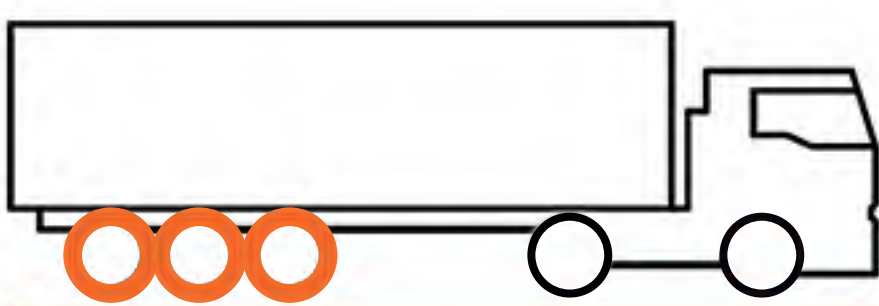

Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
205/65R17.5	16PR	129/127J(132/132G)	6.00	D	B	B	72	M+S	12.5
215/75R17.5	16PR	135/133J	6.00	D	B	B	72	M+S	12.5
235/75R17.5	18PR	143/141J	6.75	D	B	B	72	M+S	12.5
245/70R17.5	18PR	143/141J	7.50	D	B	B	72	M+S	12.5

BLT17

REGIONAL

TRAILER AXLE

- ✓ Typical combined pattern design offers optimal trailer performance
- ✓ Low rolling resistance
- ✓ Wear-resistance compound, reducing shifting to prevent uneven wear



Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
385/55R22.5	20PR	160J(158L)	12.25	D	B	B	73	3PMSF	16.5
385/65R22.5	20PR	160J(158L)	11.75	D	B	B	73	3PMSF	16.5
385/65R22.5	24PR	164J	11.75	D	B	B	73	3PMSF	16.5

BL225

ON/OFF ROAD

ALL POSITION AXLES

- ✓ Suitable for all position axle of trucks under all kinds of working conditions
- ✓ Thick sidewall design protect against sidewall impacts and bruises
- ✓ Stone rejection design protect groove bottom from stone puncture
- ✓ Lasting grip and stability, with M+S and 3PMSF marking




Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
13R22.5	18PR	156/150K	9.75	D	B	B	71	3PMSF	19.0
295/80R22.5	16PR	152/148K	9.00	D	B	B	71	3PMSF	19.0
315/80R22.5	20PR	156/150K	9.00	D	B	B	71	3PMSF	19.0
425/65R22.5	20PR	165K	12.25	D	B	B	71	3PMSF	18.5
445/65R22.5	20PR	169K	13.00	D	B	B	71	3PMSF	18.5

BLT15

ON/OFF ROAD

ALL POSITION AXLES

- ✓ Suitable for all position axle of trucks under all kinds of working conditions
- ✓ Optimization of the shoulder block, improving resistance to shoulder damage
- ✓ Stone rejection design protect groove bottom from stone puncture
- ✓ High wear resistance

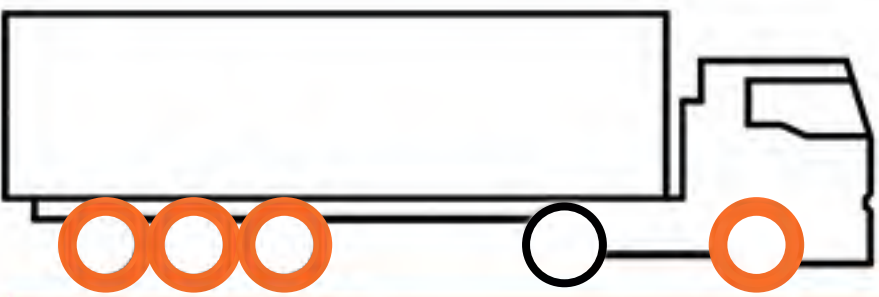

Size	PLY	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S	Tread Depth (mm)
385/65R22.5	24PR	164J	11.75	D	C	B	73	M+S	18.0
425/65R22.5	20PR	165K	12.25	D	C	B	73	M+S	18.5

TECHNICAL DATA

Size	PLY	Pattern	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S
13R22.5	18PR	BL225	156/150K	9.75	D	B	B	71	3PMSF
13R22.5	18PR	BL835	156/150K	9.75	D	B	B	73	3PMSF
205/65R17.5	16PR	BLT16	129/127J(132/132G)	6.00	D	B	B	72	M+S
215/75R17.5	14PR	BL615	126/124M	6.00	D	B	B	73	3PMSF
215/75R17.5	14PR	BL836	126/124M	6.00	E	C	B	73	3PMSF
215/75R17.5	16PR	BLT16	135/133J	6.00	D	B	B	72	M+S
225/75R17.5	14PR	BL836	129/127M	6.75	E	C	B	73	3PMSF
235/75R17.5	14PR	BL615	132/130M	6.75	D	B	B	73	3PMSF
235/75R17.5	14PR	BL836	132/130M	6.75	E	C	B	73	3PMSF
235/75R17.5	18PR	BLT16	143/141J	6.75	D	B	B	72	M+S
245/70R17.5	18PR	BLT16	143/141J	7.50	D	B	B	72	M+S
245/70R19.5	16PR	BL615	136/134M	7.50	D	B	B	73	3PMSF
265/70R19.5	16PR	BL615	140/138M	7.50	D	B	B	73	3PMSF
285/70R19.5	18PR	BL615	146/144M	8.25	D	B	B	73	3PMSF
285/70R19.5	18PR	BL836	146/144M	8.25	E	C	B	73	3PMSF
295/60R22.5	16PR	BL221	150/147L	9.00	D	C	A	70	3PMSF
295/60R22.5	16PR	BL223	150/147L	9.00	D	C	A	69	3PMSF
295/60R22.5	16PR	BL831	150/147L	9.00	C	C	B	73	3PMSF
295/60R22.5	16PR	BL833	150/147L	9.00	D	B	C	75	3PMSF
295/60R22.5	16PR	BRD1	150/147L	9.00	E	B	C	75	3PMSF
295/60R22.5	16PR	BRS1	150/147L	9.00	D	B	B	72	3PMSF
295/80R22.5	18PR	BL221	154/149M	9.00	D	C	A	70	3PMSF
295/80R22.5	18PR	BL223	154/149M	9.00	D	C	A	69	3PMSF
295/80R22.5	16PR	BL225	152/148K	9.00	D	B	B	71	3PMSF
295/80R22.5	16PR	BL831	152/148M	9.00	C	C	B	73	3PMSF
295/80R22.5	16PR	BL833	152/148M	9.00	D	B	C	75	3PMSF
305/70R19.5	18PR	BL615	148/145M	9.00	D	B	B	73	3PMSF
305/70R19.5	18PR	BL836	148/145M	9.00	E	C	B	73	3PMSF
315/60R22.5	16PR	BL221	152/148L	9.75	D	C	A	70	3PMSF
315/60R22.5	16PR	BL223	152/148L	9.75	D	C	A	69	3PMSF
315/60R22.5	16PR	BL831	152/148L	9.75	C	C	B	73	3PMSF
315/60R22.5	16PR	BL833	152/148L	9.75	D	B	C	75	3PMSF
315/60R22.5	16PR	BRD1	152/148M	9.75	E	B	C	75	3PMSF
315/60R22.5	18PR	BRS1	154/150L(152/148M)	9.75	D	B	B	72	3PMSF

Section Width (mm)	Overall Diameter (mm)	Load Bearing (mm)	Rolling Circumfrence (mm)	Load Capacity		Inflated Pressure (kPa)	Tread Depth (mm)
				Single(kg)	Dual(kg)		
320	1124	521	3428	4000	3350	875	19.0
320	1124	521	3428	4000	3350	875	21.0
204	711	334	2154	1850	1750	900	12.5
212	767	359	2339	1700	1600	700	11.5
212	767	359	2339	1700	1600	700	12.5
212	767	359	2339	2180	2060	850	12.5
226	783	365	2388	1850	1750	725	12.5
233	797	372	2431	2000	1900	775	12.5
233	797	372	2431	2000	1900	875	13.5
233	797	372	2431	2720	2570	875	12.5
248	789	364	2406	2725	2575	900	12.5
248	839	389	2559	2240	2120	825	12.5
262	867	401	2644	2500	2360	775	13.5
283	895	413	2730	3000	2800	900	13.5
283	895	413	2730	3000	2800	900	16.0
292	926	435	2806	3350	3075	900	13.0
292	926	435	2806	3350	3075	900	14.0
292	926	435	2806	3350	3075	900	16.0
292	926	435	2806	3350	3075	900	18.0
292	926	435	2806	3350	3075	900	17.0
292	926	435	2806	3350	3075	900	12.5
298	1044	487	3184	3750	3250	850	14.0
298	1044	487	3184	3750	3250	850	16.5
298	1044	487	3184	3550	3150	850	19.0
298	1044	487	3184	3550	3150	850	16.0
298	1044	487	3184	3550	3150	850	20.5
305	923	424	2815	3150	2900	850	12.0
305	923	424	2815	3150	2900	850	13.5
313	950	445	2879	3550	3150	900	12.5
313	950	445	2879	3550	3150	900	12.5
313	950	445	2879	3550	3150	900	14.5
313	950	445	2879	3550	3150	900	17.5
313	950	445	2879	3550	3150	900	18.5
313	950	445	2879	3750	3350	900	12.5

TECHNICAL DATA

Size	PLY	Pattern	L/S	Rim	RR	WG	Noise	dB	3PMSF /M+S
315/70R22.5	18PR	BL221	156/150L(154/150M)	9.00	D	C	A	70	3PMSF
315/70R22.5	18PR	BL223	156/150L(154/150M)	9.00	D	C	A	69	3PMSF
315/70R22.5	18PR	BL831	156/150L(154/150M)	9.00	C	C	B	73	3PMSF
315/70R22.5	18PR	BL833	156/150L(154/150M)	9.00	D	B	C	75	3PMSF
315/70R22.5	16PR	BRD1	154/150L(152/148M)	9.00	E	B	C	75	3PMSF
315/70R22.5	18PR	BRS1	156/150L(154/150M)	9.00	C	B	B	72	3PMSF
315/80R22.5	22PR	BL223	158/150L(154/150M)	9.00	D	C	A	69	3PMSF
315/80R22.5	20PR	BL225	156/150K	9.00	D	B	B	71	3PMSF
315/80R22.5	20PR	BL831	156/150L(154/150M)	9.00	C	C	B	73	3PMSF
315/80R22.5	20PR	BL833	156/150L(154/150M)	9.00	D	B	C	75	3PMSF
315/80R22.5	20PR	BL835	156/150K	9.00	D	B	B	73	3PMSF
315/80R22.5	20PR	BRD1	156/150L(154/150M)	9.00	E	B	C	75	3PMSF
315/80R22.5	22PR	BRS1	158/150L(154/150M)	9.00	C	B	B	72	3PMSF
385/55R19.5	18PR	BLT11	156J	12.25	C	C	B	73	3PMSF
385/55R22.5	20PR	BL221	160K(158L)	12.25	D	C	A	70	3PMSF
385/55R22.5	20PR	BL223	160K(158L)	12.25	D	C	A	69	3PMSF
385/55R22.5	20PR	BLT11	160K(158L)	12.25	C	C	B	73	3PMSF
385/55R22.5	20PR	BLT17	160J(158L)	12.25	D	B	B	73	3PMSF
385/55R22.5	20PR	BRT1	160K	12.25	C	A	A	68	3PMSF
385/65R22.5	24PR	BL223	164K(158L)	11.75	D	C	A	69	3PMSF
385/65R22.5	24PR	BLT11	164K(158L)	11.75	C	C	B	73	3PMSF
385/65R22.5	24PR	BLT15	164J	11.75	D	C	B	73	M+S
385/65R22.5	20PR	BLT17	160J(158L)	11.75	D	B	B	73	3PMSF
385/65R22.5	24PR	BLT17	164J	11.75	D	B	B	73	3PMSF
385/65R22.5	24PR	BRT1	164K(158L)	11.75	C	A	A	68	3PMSF
425/65R22.5	20PR	BL225	165K	12.25	D	B	B	71	3PMSF
425/65R22.5	20PR	BLT11	165K	12.25	C	C	B	73	3PMSF
425/65R22.5	20PR	BLT15	165K	12.25	D	C	B	73	M+S
435/50R19.5	20PR	BLT11	160J	14.00	C	C	B	73	3PMSF
445/45R19.5	20PR	BLT11	160J	15.00	C	C	B	73	3PMSF
445/65R22.5	20PR	BL225	169K	13.00	D	B	B	71	3PMSF

Section Width (mm)	Overall Diameter (mm)	Load Bearing (mm)	Rolling Circumfrence (mm)	Load Capacity		Inflated Pressure (kPa)	Tread Depth (mm)
				Single(kg)	Dual(kg)		
312	1014	468	3093	4000	3350	900	15.0
312	1014	468	3093	4000	3350	900	15.5
312	1014	468	3093	4000	3350	900	16.5
312	1014	468	3093	4000	3350	900	20.0
312	1014	468	3093	3750	3350	900	19.5
312	1014	468	3093	4000	3350	900	14.5
312	1076	500	3282	4250	3350	900	15.5
312	1076	500	3282	4250	3350	900	19.0
312	1076	500	3282	4000	3350	850	17.0
312	1076	500	3282	4000	3350	850	22.0
312	1076	500	3282	4000	3350	850	21.0
312	1076	500	3282	4000	3350	850	20.5
312	1076	500	3282	4250	3350	900	15.0
386	919	426	2785	4000		900	12.5
386	996	464	3018	4500		900	12.0
386	996	464	3018	4500		900	13.5
386	996	464	3018	4500		900	12.0
386	996	464	3018	4500		900	16.5
386	996	464	3018	4500		900	14.5
389	1072	496	3248	5000		900	15.5
389	1072	496	3248	5000		900	13.5
389	1072	496	3248	5000		900	18.0
389	1072	496	3248	4500		900	16.5
389	1072	496	3248	5000		900	16.5
389	1072	496	3248	5000		900	15.5
430	1124	518	3406	5150		830	18.5
430	1124	518	3406	5150		830	14.5
430	1124	518	3406	5150		830	18.5
438	931	431	2821	4500		900	12.5
446	895	416	2712	4500		900	12.5
444	1150	529	3485	5800		900	18.5



MADE IN SERBIA